

FEATURES

- ❖ 24V AC or DC operation
- ❖ 12A/120V AC rated contacts
- ❖ LED relay indication
- ❖ Small size 1.2" by 2.3"

APPLICATIONS

- ❖ Remote mounted control relay
- ❖ Maintain low voltage panel requirements
- ❖ Remote Fan start - stop control
- ❖ Status feedback relay


DESCRIPTION

The PRM accepts 24V AC/DC and a green led indicates when the relay is energized. The PRM uses a SPDT or form C relay output rated at 12A @ 120V AC.

MOUNTING


The PRM may be mounted by using a #8 x 1¼" self tapping screw, or by the double-sided adhesive tape, both provided, or by enclosing it in a handy box.

WIRING CONFIGURATION

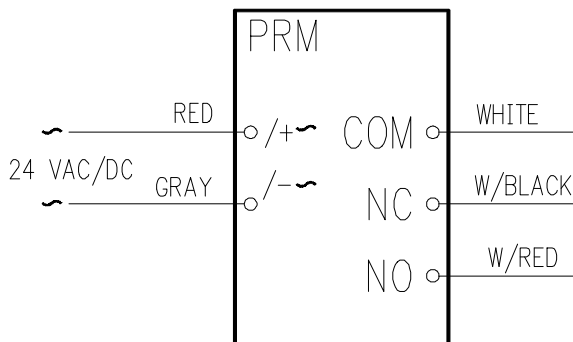

ORDERING INFORMATION

PRM - 24V AC/DC Relay Module

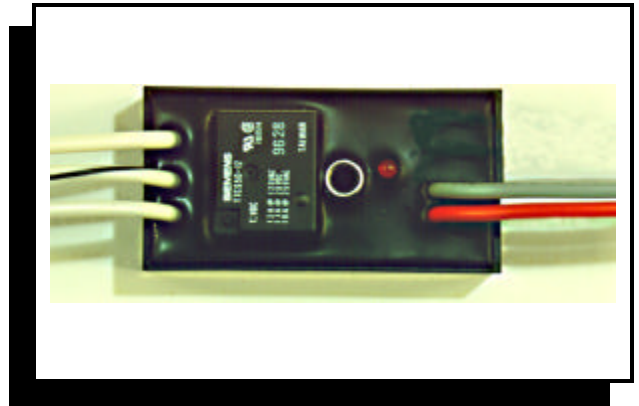

SPECIFICATIONS

- SIZE:** 1.2" L x 2.3" W x .95" H
- MOUNTING:** 2" L x 1" W Double-sided foam tape
And 1.25" self tapping Phillips screw
- POWER:** 24V AC .35VA 50/60Hz or
24V DC @ 15mA
- AMBIENT TEMP:** 0-50°C

RELAY SPECIFICATIONS

- RELAY:** Form C with contact rated for:
12A @ 120V AC,
10A @ 28V DC,
10A @ 250V AC.
Mechanical life >100 million ops.
- CONNECTIONS:** 12" 18 AWG UL# 1015 listed wire
Qty. 7 wire nuts

PHYSICAL CONFIGURATION

